



Cod. P2-C1
Ø 420 mm
-1,0/+1,3 bar



Cod. P2-C2
Ø 420 mm
-1,0/+3,5 bar



Cod. P2-C3
Ø 300 až 500 mm
-1,0/+1,3 bar



Cod. P2-C4
Ø 420 mm
-1,0/+0,9 bar



Cod. P2-C5
Ø 300 / 420 mm
-1,0/+0,7 bar



Cod. P2-D1
Ø 500 mm
-1,0/+0,4 bar



Cod. P2-D2
Ø 150/200/250 mm
-1,0/+15 bar




Cod. P2-D2
Ø 300 až 800 mm
-1,0/+1,0 bar



Cod. P2-D3
Ø 300 až 800 mm
až -1,0/+6,0 bar



Cod. P2-D4
Ø 420 mm
-1,0/+0,6 bar

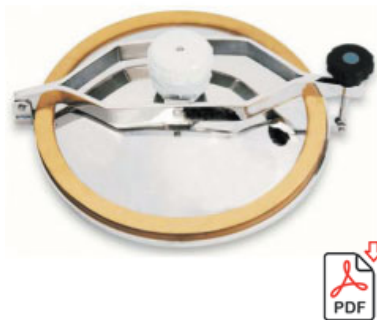

Cod. P2-D5
Ø 420 mm
+0,002 bar



Cod. P2-D6
Ø 420 / 455 / 500 mm
-0,5/+0,3 bar



Cod. P2-D7
Ø 385 až 600 mm
+0,02 bar



Cod. P2-D8
Ø 200 až 600 mm
-0,5/+0,2 bar



Cod. P2-D9
Ø 150 až 600 mm
+0,02 bar



Cod. P2-D10
Ø 150 až 600 mm
+0,02 bar



Cod. P2-D11
Ø 150 až 600 mm



Cod. P2-D12
Ø 150 až 600 mm
-0,5/+0,2 bar



Cod. P2-D13 (PED)
Ø 300 až 700 mm
až +10,5 bar



Cod. P2-D13 (PED)
Ø 150 až 250 mm



Cod. P2-D14
Ø 500 až 1600 mm
-0,8/+0,3 bar



Cod. P2-D15
Ø 420 až 800 mm
-0,5/+0,3 bar



Cod. P2-D20
Ø 200 až 1600 mm
-0,5/+0,2 ba



Cod. P2-D22
Ø 200 až 600 mm
-0,3/+0,1 bar



Cod. P2-D22E
Ø 200 až 600 mm
+0,01 ba



Cod. P2-D22EO
Ø 400 mm
+0,01 bar



Cod. P2-D25 (PED)
Ø 300 až 700 mm
-1,0/+1,0 bar



Cod. P2-D26
Ø 200 až 250 mm




Cod. P2-D26
Ø 300 až 600 mm
-1,0/+3,0 bar



Cod. P2-D28
Ø 700 až 1000 mm
+1,0 bar



Cod. P2-D32
Ø 400 až 600 mm
-1,0/+4,0 bar

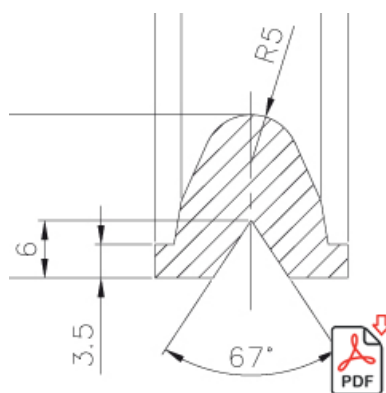

Těsnění



Ovládání





Cod. P12-510/610/800
Ø 504 mm, Ø 604 mm, Ø 800 mm
1 bar




Cod. P22-238/239/249
Ø 204 mm Ø 354 mm
1,3 - 3,2 bar



Cod. P22-233 až 669
204 až 600 mm
2,7 - 8 bar



Cod. P22-265/266/286
Ø 504 mm Ø 604 mm
0,9 - 1,3 bar

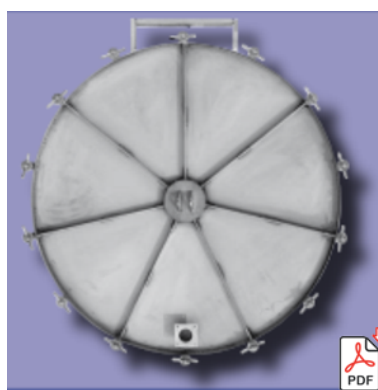

Cod. P22-1600
Ø 1600 mm
1 bar



Cod. P31-080/81
Ø 800 mm
0,1 bar / aseptický




Cod. P31-200/300/400/500/600
Ø 200 mm, Ø 300 mm, Ø 430 mm, Ø 500 mm, Ø 600 mm
0,05 0,8 bar / aseptický



Cod. P31-498/598/698
Ø 430 mm, Ø 500 mm, Ø 600 mm
0,05 - 0,2 bar / aseptický



Cod. P31-230/330/430/530/630
Ø 200 mm, Ø 300 mm, Ø 430 mm, Ø 500 mm, Ø 600 mm
0,05 - 0,1 bar

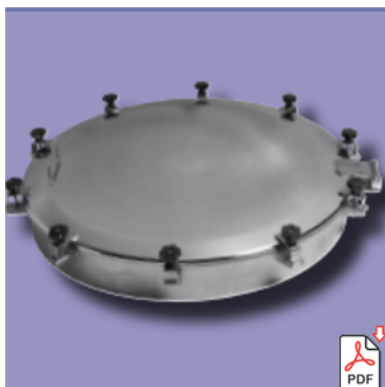

Cod. P31-835/1035/1235/1435

Ø 855 mm, Ø 1035 mm, Ø 1200 mm, Ø 1400 mm
0,1 bar



Cod. P32-305/405/705/805

Ø 300 mm, Ø 400 mm, Ø 500 mm, Ø 600 mm
0,6 - 1,2 bar



Cod. P33-150/230/330/430/530/630

Ø 145 mm, Ø 220 mm, Ø 296 mm, Ø 393 mm, Ø 500 mm, Ø 630 mm
0,05 - 0,4 bar



Cod. P33-114/255/315

Ø 204 mm, Ø 255 mm, Ø 354 mm
0,3 - 0,8 bar



Cod. P33-212/213

Ø 504 mm, Ø 604 mm
0,1 bar




Cod. P33-200/300/400/500/600

Ø 200 mm, Ø 300 mm, Ø 400 mm, Ø 500 mm, Ø 600 mm
0,05 - 0,3 bar



Cod. P33-196/301/401/501/601

Ø 200 mm, Ø 300 mm, Ø 400 mm, Ø 500 mm, Ø 600 mm
0,1 - 0,6 bar

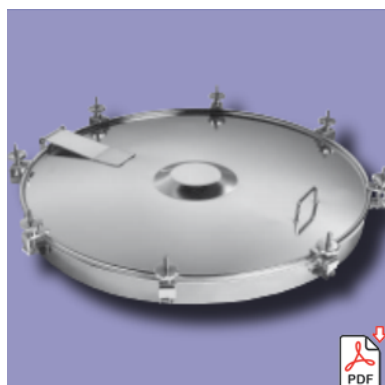

Cod. P33-107

Ø 1007 mm
0,1 bar



Cod. P34-050

Ø 1000 mm
0,1 bar / pro dřevěné nádrže



Cod. P34-023/024/107
Ø 500 mm, Ø 600 mm Ø 1007 mm
0,1 bar / pro dřevěné nádrže




Cod. P34-315
Ø 354 mm
0,4 bar / pro dřevěné nádrže

Cod. P35-418
Ø 432 mm
0,3 bar



Cod. P35-315
Ø 384 mm
0,3 bar

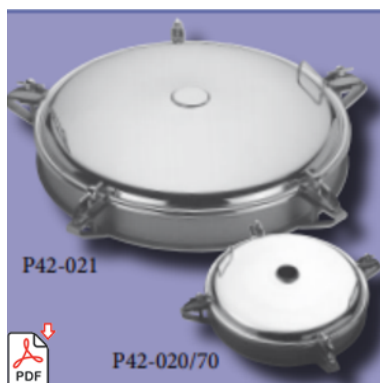


Cod. P42-020/70/21/70
Ø 490 mm Ø 590 mm
0,1 bar / k zabetonování



Cod. P42-835/1035/1235/1435
Ø 855 mm, Ø 1035 mm Ø 1200 mm, Ø 1400 mm
0,1 bar / k zabetonování



Cod. P42-080/81
Ø 800 mm
0,1 bar / k zabetonování

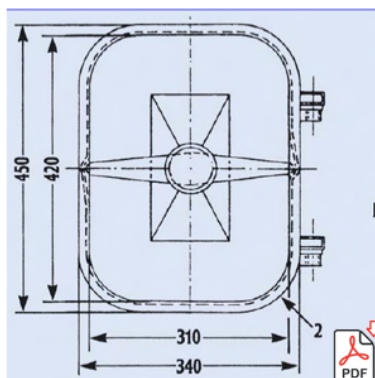

Další info
těsnění
ovládání



Cod. 16
Ø 420 mm
+0,4 bar



Cod. 17, 17 SUPER
Ø 420 mm
+0,5 , +0,7 bar



Cod. 17C1, 17C2
Di Ø 900, 680 mm
-1/+2 , -1/+4 bar



Cod. 18F
240 x 470 mm
+0,5 bar



Cod. 20
Di Ø 223, 304, 398, 500, 600 mm
+0,01 bar



Cod. 22
Di Ø 145, 220, 299, 394, 499, 598 mm
0 bar



Cod. 22 ECO
Di Ø 220, 299, 394, 499, 598mm
0 bar



Cod. 23
Di Ø 220, 300, 398, 500, 600 mm
-0,5/+3 , -0,3/+1 bar



Cod. 23H
Di Ø 220, 300, 398, 500, 600 mm
-0,5/+3 , -0,3/+1 bar



Cod. 23H

Di Ø 220, 300, 398, 500, 600mm
-0,5/+3 , -0,3/+1 bar



Cod. 24

Di Ø 223, 304, 398, 500, 600 mm
-0,5/+0,1 , -0,3/+0,05 bar



Cod. 25HS (PED)

Di Ø 806, 906 mm
-1/+1,4 bar



Cod. 25L

Di Ø 150, 200, 300, 350, 400, 450, 500, 600 mm
-1/+4 , -1/+2 bar



Cod. 25P

Di Ø 150, 200, 300, 350, 400, 450, 500, 600 mm
-1/+4 , -1/+2 bar



Cod. 25RM

Di Ø 305, 400, 500, 600 mm
-1/+0,15 , -1/+0,05 bar



Cod. 25RP (PED)

Di Ø 305, 400, 500, 600 mm
-1/+1 , -1/+4 bar



Cod. 25V

Di Ø 200, 300, 400, 500, 600 mm
-1/+3 , -1/+1 bar



Cod. 25VA

Di Ø 200, 300, 400, 500, 600 mm
-1/+0,05 , -1/+0,02 bar



Cod. 26N
Di Ø 430, 500, 600 mm
-0,7/0,01 , -0,5/+0,01 bar



Cod. 27A
Di Ø 200, 300, 400, 450, 500, 600 mm
0 bar



Cod. 27A ECO
Di Ø 200, 300, 400, 500, 598 mm
0 bar



Cod. 27E
Di Ø 200, 300, 400, 499, 598 mm
+0,01 bar



Cod. 27L
Di Ø 200, 300, 430, 444, 500, 600 mm
+0,05 , +0,04 bar



Cod. 27V
Di Ø 430, 500, 600 mm
+0,01 bar



Cod. 28A
Di Ø 200, 300, 400, 500, 598 mm
-0,5/+0,1 , -0,3/+0,05 bar



Cod. 28C
Di Ø 740, 888, 1200, 1400 mm
+0,01 bar



Cod. 28E
Di Ø 430, 444, 500, 600 mm
+0,01 bar



Cod. 28F
Di Ø 430, 500, 600 mm
-0,5/+0,5 , -0,3/+0,3bar



Cod. 29A
Di Ø 200, 299, 398, 498, 598 mm
-0,5/+2 , -0,3/+0,5 bar



Cod. 29P
Di Ø 806, 1006, 1206, 1406 mm
+0,1 bar



Cod. 29R
Di Ø 220, 299, 394, 499, 598 mm
-0,5/+1,5 , -0,3/+0,3bar



Cod. 31
450 x 450 mm
+0,01 bar



Cod. 32
Di Ø 394, 499, 598 mm
-0,05/+0,3 , -0,03/+0,2 bar



Cod. 33
460 x 460 mm
+0,01bar